

IP Communication Terminal

**IP100H**

Remote Communicator

**IP100FS**

Controller

**IP1000C**

## Full-Duplex Communication That Works Over a Wireless LAN and IP Network\*

- Easy system to set up and use
- Up to 100 users can communicate at the same time
- Encryption provides extra security
- Range is only restricted by your IP network coverage
- No licence fee required, no call charges





# Wireless LAN System Extends Your Communication Coverage.

## Individual, Group or Area Communication




Staff spread across an extended site, such as a hotel, can communicate seamlessly.

## Hands-free, Full-duplex Communication



With an optional earphone-mic or headset HS-102 or HS-85, the IP100H user can talk and receive simultaneously like a phone call. Hands-free operation allows your staff to carry out other tasks at the same time.

## Intra-building Communication

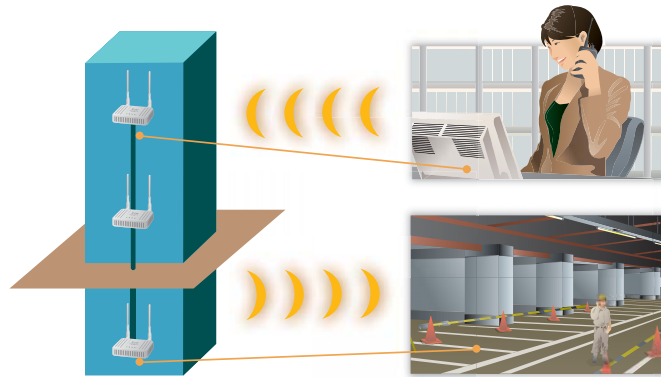

By deploying access points along the IP network, the IP advanced radio system can communicate all the way from the basement to the top floor. The IP100H can access the nearest access point and can roam between access points\*. \*Same SSIDs are required for roaming use.

## Dispersed Sites Communication



If connected over an Internet VPN, the IP100H/IP100FS can communicate between dispersed sites such as offices or shops in different cities.

## Application examples

- Hotels
- Warehouse / Manufacturing
- Hospitals
- Security
- Restaurant / Drive Thru
- Supermarkets / Retail Shops

### IP Communication Terminal IP100H

- IPX7 waterproof (1m depth water for 30 minutes) for outdoor work or places prone to get wet.
- Compact 58x95x26.4 mm body and 205g (approximate) lightweight.
- Vibration alert function for incoming calls.
- Emergency call with higher priority.
- Tested to the MIL-STD 810 G specifications.



\* The IP100H can be used with an internal antenna. (Communication range will decrease to half from/to access points.)



### Wireless LAN Access Point AP-90M

- IEEE 802.11 a/b/g/n/ac compliant
- PoE (Power over Ethernet) capability
- Optional RS-AP3, Access point management software



### Remote Communicator IP100FS

(Supplied with USB flash drive for use as a USB hardware key)

- The IP100FS can communicate with IP communication terminals from a PC.
- The IP100FS can obtain location information of each IP100H based on the access point being used.
- Can be installed on a Windows® based tablet PC as well as a laptop PC.



### Controller IP1000C

- The IP1000C controls all terminal configurations and voice traffic.
- Capable of controlling up to 100 terminals (including IP100FSs).
- Links up to 11 IP1000Cs over an IP network (Internet VPN) and increases the number of usable IP100H/IP100FS communication terminals to 1100 units.



## Full-duplex Communication

With an optional earphone-mic or headset HS-102 or HS-85, the IP100H can talk and receive at the same time. All users in the system can communicate simultaneously.

## High Security

The wireless LAN security protocols (WPA-PSK (TKIP/AES), WPA2-PSK (TKIP/AES)) encrypt your private conversations.


## Status and Short Data Messaging

The IP100H/IP100FS can send status and short data messages\* to other users.

\* The IP100H can send only preprogrammed messages.

## Easy System to Set Up and Use

The IP1000C programs almost all terminal configurations over the air. Individual PC programming via cable connection is not required. (Except initial setup)

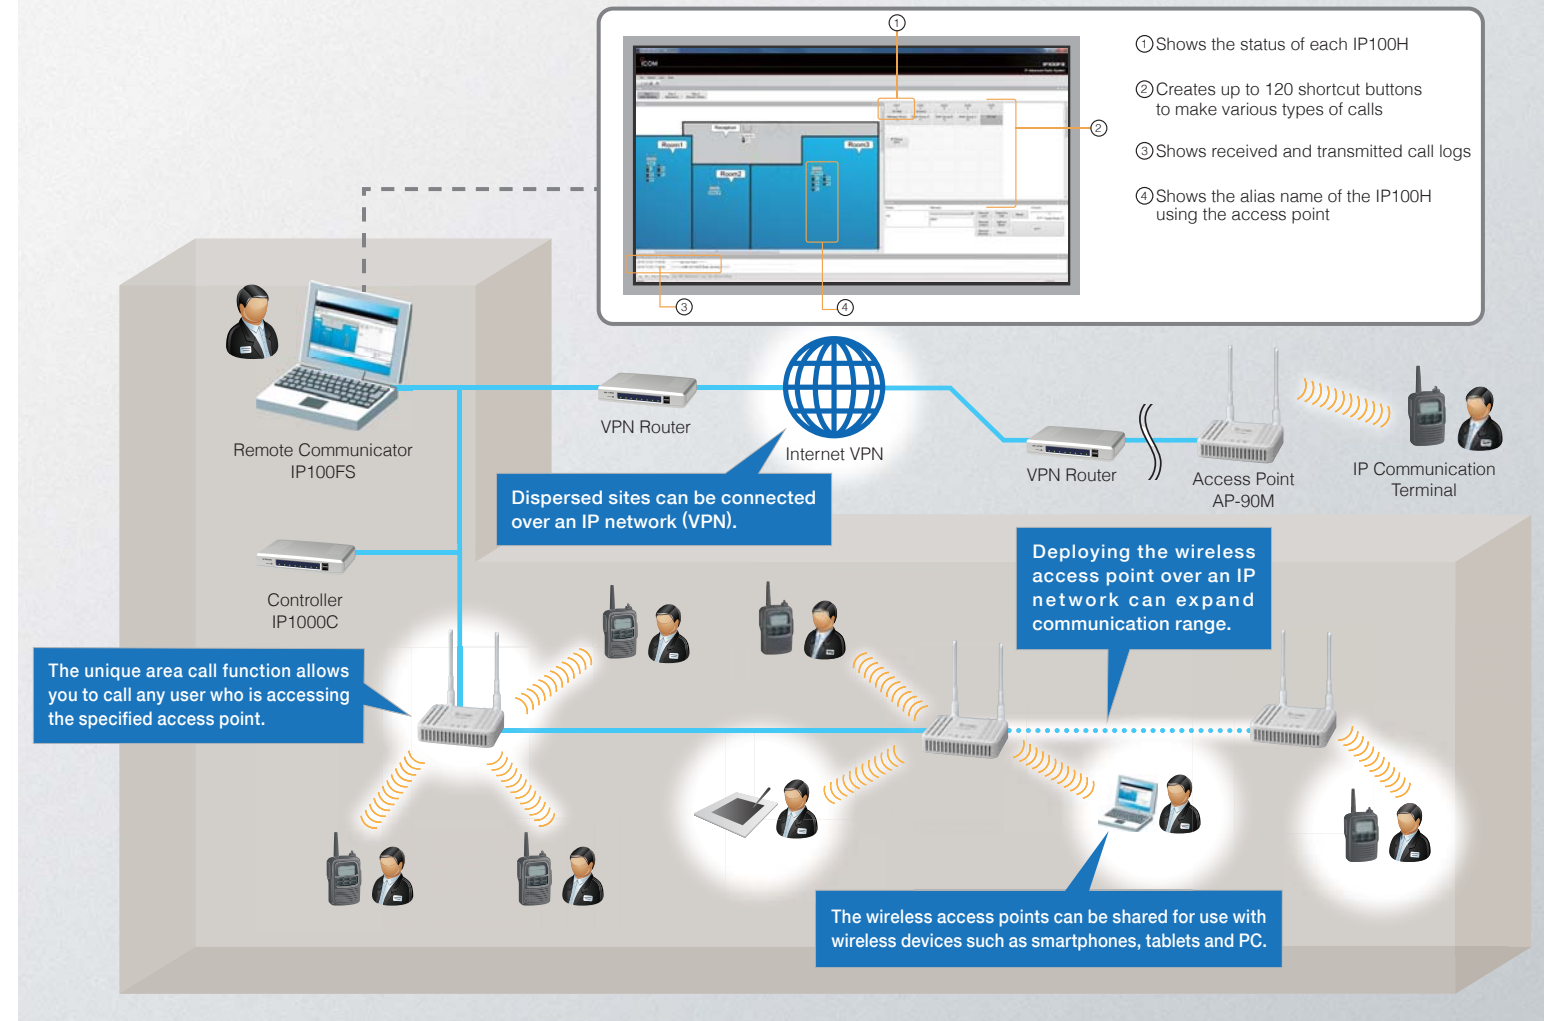

## RoIP GATEWAY

### IP Phone and Transceiver Interconnection


With a VE-PG3 RoIP gateway, the IP advanced radio system can interconnect with an IP phone, IDAS™ NXDN™\*1, IDAS™ dPMR™ Mode 2 digital and analogue transceivers. When used with an IP phone system, the IP100H can be used as a phone handset for making internal or external calls.\*2

\*1 NXDN™ Type-D multi-site trunking and conventional system using the IC-FR5000/FR5200H series.

\*2 For interconnection with other equipment, verification tests are required before the installation. The IP100H can call a preprogrammed phone number only. (Cannot manually enter phone numbers to make a call.)



**Interconnection image** The IP communication terminals, radios and telephones can communicate with each other within the doughnut shaped blue ring.

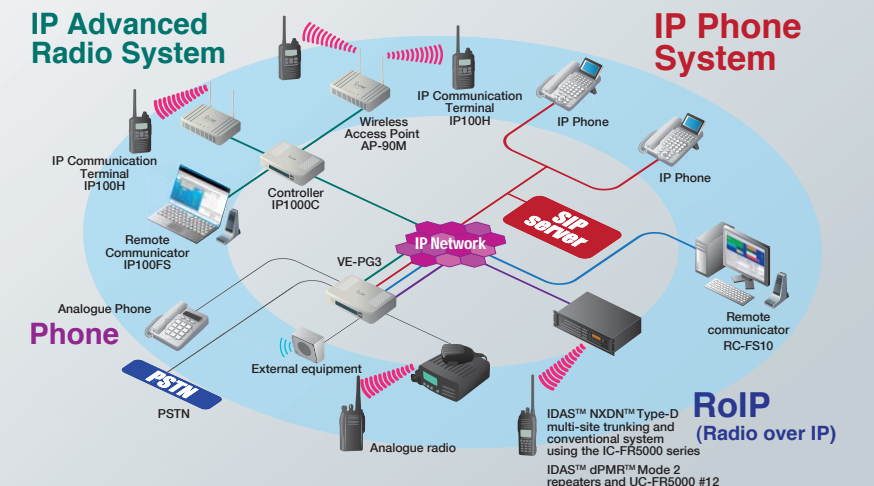

# IP ADVANCED RADIO SYSTEM

## SPECIFICATIONS

### IP100H

Wireless standards	IEEE 802.11 a/b/g/n
Frequency range	2.4-2.4835 GHz, 5.15-5.35, 5.47-5.85 GHz
Dimensions (W x H x D) <sup>1</sup>	58 x 95 x 26.4 mm; 2.3 x 3.7 x 1.0 in (with BP-271)
Weight (approx.)	205 g; 7.2 oz (with BP-271 and antenna)
Operating time <sup>2</sup>	More than 20 hours (with BP-271)
RF output power	Less than 10 mW/MHz
Voice Codec	G.711 $\mu$ -law (64 kbps)
AF output power (10% distortion)	Internal SP 400 mW (typ., 16 $\Omega$ load), External SP 200 mW (typ., 8 $\Omega$ load)
Security	WEP (64/128-bit), WPA-PSK (TKIP/AES), WPA2-PSK (TKIP/AES)
Operating temperature	-10 °C to +60 °C; +14 °F to +140 °F

<sup>1</sup> Projections are not included. <sup>2</sup> Tx: Rx: Stand-by=1 : 1 : 8 duty cycle

#### Supplied accessories

- BP-271 Li-ion battery pack
- MB-127 belt clip
- Hand strap
- Antenna
- Antenna cap

### IP100FS (System requirements)

Operating system	Windows® 10 (32-bit/64-bit), Windows® 8/Windows® 8.1 (32-bit/64-bit) Windows® 7 (32-bit/64-bit) SP1 or later, Windows Vista® (32-bit/64-bit) SP2 or later, (Except for Windows® RT)
CPU	Intel® Core™ 2 Duo Processor E6600/ 2.4 GHz or better
Memory	2 GB or higher
Hard disk space	1 GB of disk space (for saving log files)
Audio	DirectSound compatible audio (Frequency response up to 20 kHz, sampling rate 48 kHz)
Display resolution	1920x1080 pixel recommended 1024x768 pixel minimum
Other	USB 2.0 port, 10 Mbps or faster Ethernet interface, speaker, microphone or headset

### IP1000C

Power supply	100-240 V AC (With supplied AC adapter)
Operating temperature	0 °C to +40 °C; +32 °F to +104 °F
Dimensions (W x H x D) <sup>3</sup>	232 x 38 x 168 mm; 9.1 x 1.5 x 6.6 in
Weight (approx.)	750 g; 1.65 lb (Main unit only)
LAN	RJ-45 connector x 4 1000BASE-T/100BASE-TX/10BASE-T (Auto MDI/MDI-X)
USB	Standard A receptacles x 2
Maintenance console	RS-232C (RJ-11) connector

<sup>3</sup> Projections are not included.

#### Supplied accessories

- BC-207S AC adapter
- Cushion sheets
- Ferrite core

### AP-90M

Power supply	12 V DC $\pm$ 10% or PoE (IEEE802.3af compatible)
Dimensions (W x H x D) <sup>4</sup>	120 x 29 x 103 mm; 4.7 x 1.1 x 4.1 in
Weight (approx.)	300 g; 10.6 oz (Main unit only)
Wired LAN	RJ-45 connector x 1 1000BASE-T/100BASE-TX/10BASE-T (Auto MDI/MDI-X)
Wireless LAN	IEEE 802.11 a/b/g/n/ac
Frequency range	2.4-2.4835 GHz, 5.15-5.35, 5.47-5.85 GHz
Security	WEP (64/128/152-bit), WPA, WPA2, WPA-PSK, WPA2-PSK
Operating temperature	0 °C to +40 °C; +32 °F to +140 °F

<sup>4</sup> Projections are not included.

#### Supplied accessories

- Mounting bracket

All stated specifications are subject to change without notice or obligation.

## OPTIONS

### For IP100H



**BP-271** Rechargeable Li-ion 1150/1200 mAh (min./typ.)  
**BP-272** Rechargeable Li-ion 1880/2000 mAh (min./typ.)  
**BP-273** LR6 (AA) batteries x 3

#### Rapid charger



**BC-202** **BC-123S\***  
\* BC-123SA for USA plug, SE for Europe plug, SV for Australia plug.

#### Multi-charger



**BC-211** **BC-157S**

#### Headsets (Full-duplex operation)



**HS-102** Earphone type. OPC-2359 is required.  
**HS-85** Over-the-head type. OPC-2144 is required.

#### Earphone-microphones (Full-duplex operation)



**HM-153LS** **HM-166LS**  
Use HM-153LS or HM-166LS for full-duplex operation also.

#### Speaker-microphones (Simplex operation)



**HM-183LS** IPX7 Waterproof  
**HM-186LS**

#### Headsets (Simplex operation)



**HS-94** Earhook type  
**HS-95** Behind-the-head type  
**HS-97** Throat type

\* Either OPC-2006LS or OPC-2328 is required when using any of these headsets.

- **MB-127:** Belt Clip. Same as supplied.
- **OPC-2144:** Slim L-Type plug adapter cable. Required when using either HS-85, HM-153 or HM-166.
- **OPC-2006LS:** Plug adapter cable
- **OPC-2328:** PTT switch cable  
Either OPC-2006LS or OPC-2328 is required when using any of HS-94, HS-95 or HS-97.
- **OPC-2359:** PTT switch cable  
OPC-2359 is required when using HS-102.
- **OPC-478UC + OPC-2144:** Setup cables. Both cables are required for initial setup.

### For IP100FS



**CT-23**



**BC-147S\***  
For use with CT-23



**SM-26**



**HM-152**




**OPC-1402**

### For IP1000C

### For AP-90M



**BC-207S**

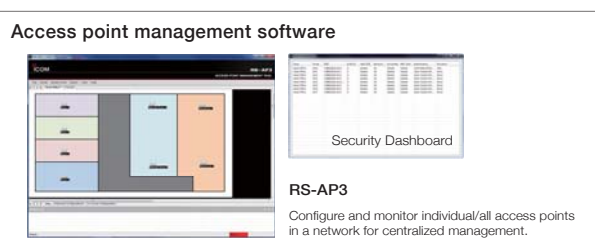

**RS-AP3**  
Configure and monitor individual/all access points in a network for centralized management.

Les spécifications et informations données dans ce document peuvent être modifiées sans préavis. La configuration du poste peut varier suivant les versions.

## Icom France s.a.s.

Zac de la Plaine - 1, Rue Brindejonn des Moulinais  
BP 45804 - 31505 TOULOUSE CEDEX 5  
Tél : +33 (0)5 61 36 03 03 - Fax : +33 (0)5 61 36 03 00  
WEB ICOM : <http://www.icom-france.com>  
E-mail : [icom@icom-france.com](mailto:icom@icom-france.com)



FOUNDING MEMBER OF



## CACHET DISTRIBUTEUR



62 avenue de Gavarnie 31240 L'UNION

05 61 74 34 07

contact@blanc-radiocom.fr

www.blanc-radiocom.fr

